


# CP37 Circular Polariser

## SPECIFICATION TABLE

Item	Unit	CP37	
Single transmission av.	%	37,0 (450-800nm)	
Double transmission av.	%	0,01 (560nm)	
Polarizing efficiency av.	%	> 99,8 (450-800nm)	
Durability	-	Heat resistance	Humidity resistance
		70°x240h	40°x90%RHx240h

Transmission		
	T <sub>single</sub> %	T <sub>double</sub> %
450nm	37,2	5,00
500nm	39,4	2,00
550nm	37,0	0,30
600nm	35,5	0,10
650nm	37,6	0,010
700nm	37,3	1,70
750nm	39,5	3,40

These spectral values given are considered typical.

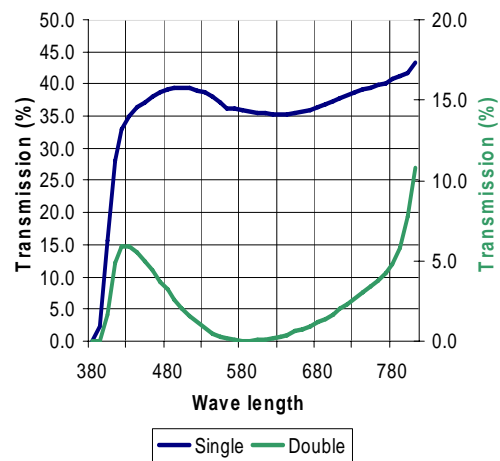

Typ	Rotation	Thickness (mm)	Dimension (mm)
CP37-30	left hand	0.3	600x500
CP37-30RH	right hand	0.3	600x500